

1.5 Power socket (ASAE)

Rear power socket (ASAE)

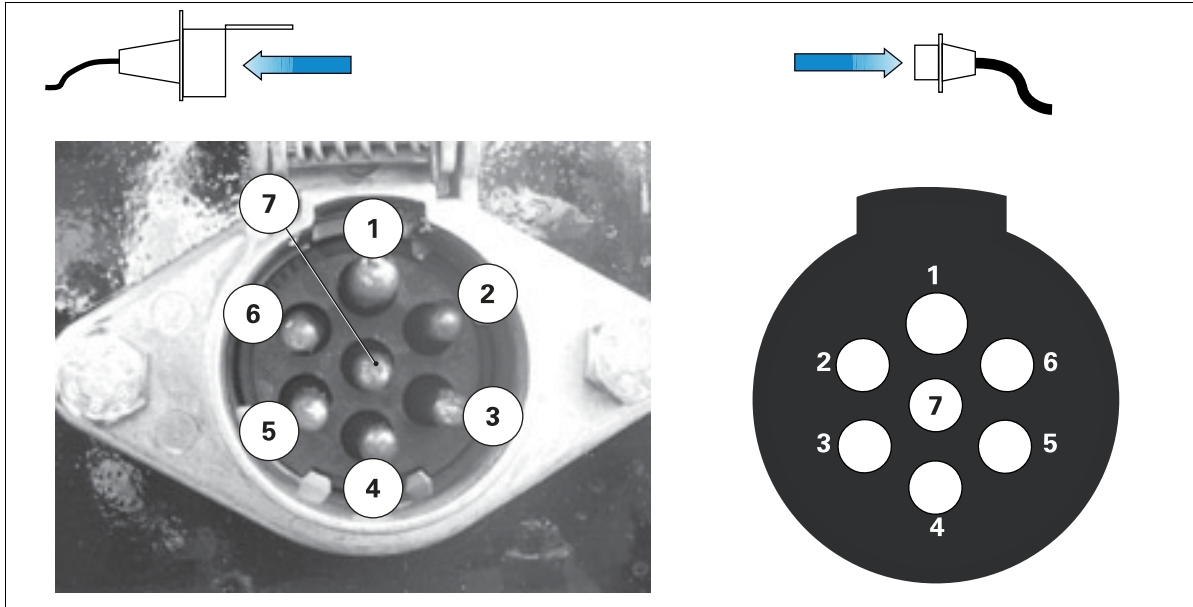


Fig. 8.

1003555

Reference	ASAE circuit	Maximum electrical charge	Fuses
(1)	Weight	-	-
(2)	Rear work light	2x 55 W	F17
(3)	Left-hand indicator and hazard warning light	4x 21 W	F15
(4)	Stop lights	NC	F46
(5)	Right-hand indicator and hazard warning light	4x 21 W	F15
(6)	Rear side lights	4x 6 W	F36
(7)	Accessories	20 A	NC

A - Fuse box, electrical diagrams and harnesses

ASAE/ISO front power socket (rear view)

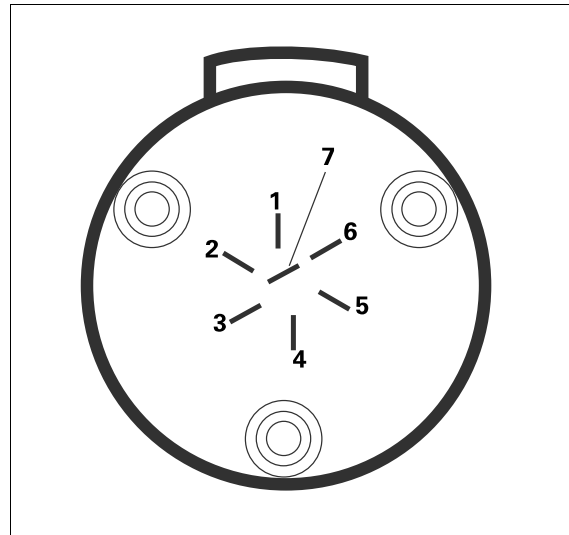


Fig. 9.

1030599

Reference	System	Maximum electrical charge
(1)	+ Battery ²	25 A
(2)	Work lights	NC
(3)	Weight	-
(4)	+ 12 V APC ¹	10 A
(5)	Side lights	NC
(6)	Rotary beacon	NC
(7)	Side lights	NC

1. + APC = + 12 V accessories
2. + BAT = + 12 V battery