

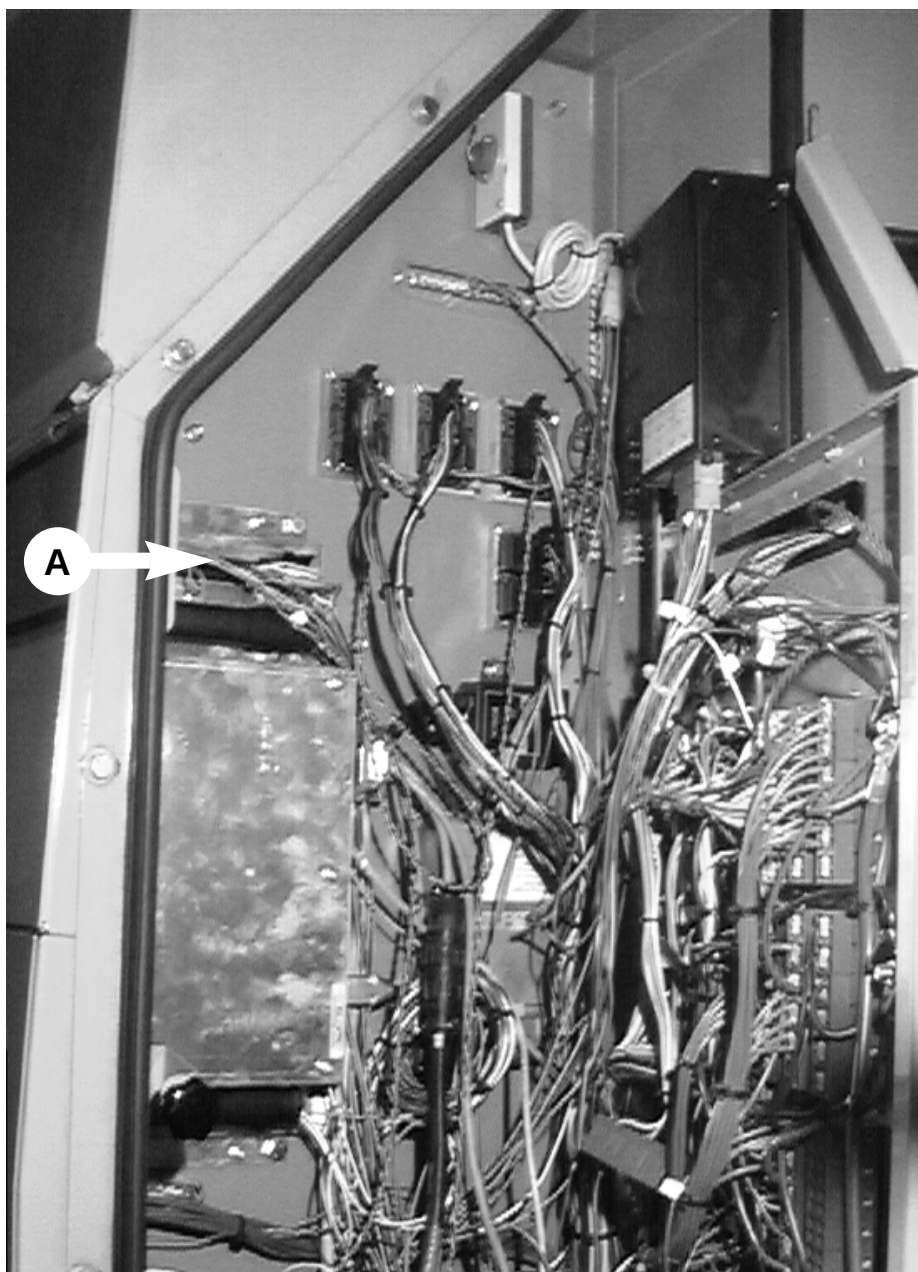






5650H – 5690HTS

Connector pin assignment at job computer

signal	colour	signification	Connector A Pin No.	signification	colour	signal
			18			
			35			
			17			
			34			
			16			
12V/4V	br-ws	elevator speed	33			
			15			
			32			
			14	spreader drum speed*	gr-rt	inductive
			31			
			13			
			30			
			12	ground stabilized	br-ws	0V
0V	br-ws	ground stabilized	29			
			11	ignition stabilized	rt-ws	12V
			28			
			10			
			27			
			9			
			26			
			8			
			25			
			7			
			24			
			6			
			23			
			5	CAN-GND	sw	0V
data	rt	CAN-L	22			
			4	CAN-H	bl	data
data	ro	GPS/printer RxD	21			
			3	GPS/printer TxD	gr	data
data	ge	yield logger RxD	20			
			2	yield logger TxD	gn	data
0V	br	screen ground	19			
			1	screen power supply	ws	12V

* only for 8XL