

Remote Electric Adjust Cab Mirrors

CAB MIRROR

Removal

FIG. 2: At the center of the front of the cab remove the hardware (2) that fastens the grab rail (1) to the combine cab frame.

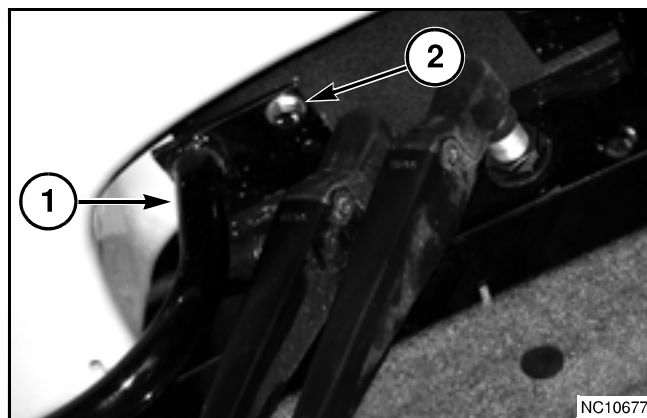


FIG. 2

FIG. 3: Remove the hardware (1) fastening the mirror support access cover (2) to the mirror support. Remove the mirror support access cover.

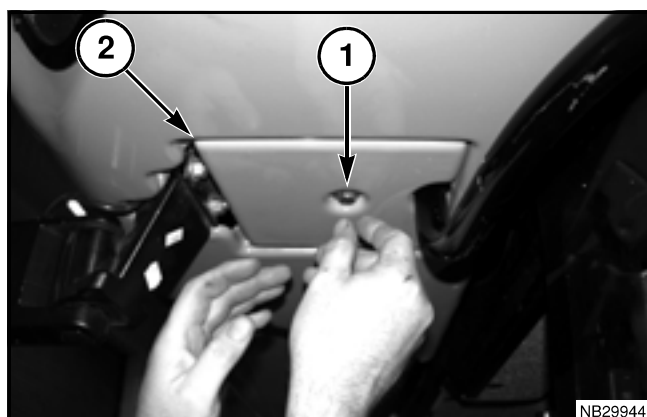


FIG. 3

FIG. 4: Remove the hardware (1) that fastens the grab rail (2) to the mirror support.

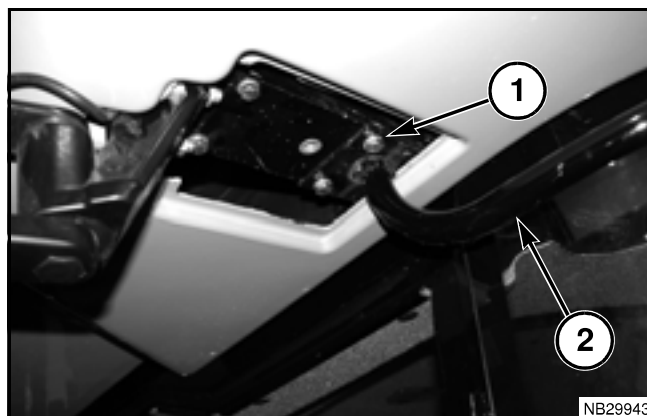


FIG. 4

Remote Electric Adjust Cab Mirrors

FIG. 5: Remove the outer right-hand or left-hand flood lamp assembly to access the roof support bracket (1).

Remove the hardware (2) fastening the roof support bracket to the roof and mirror bracket.

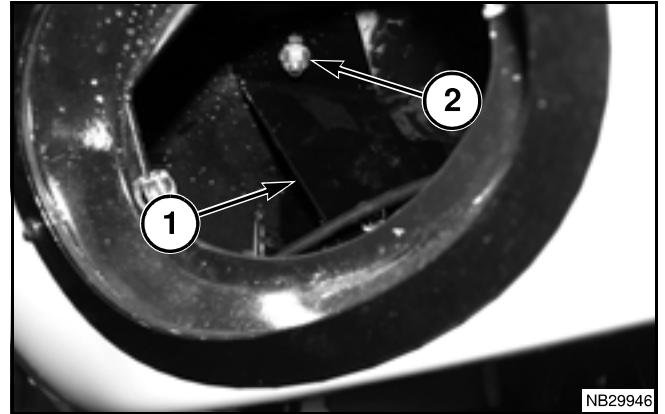


FIG. 5

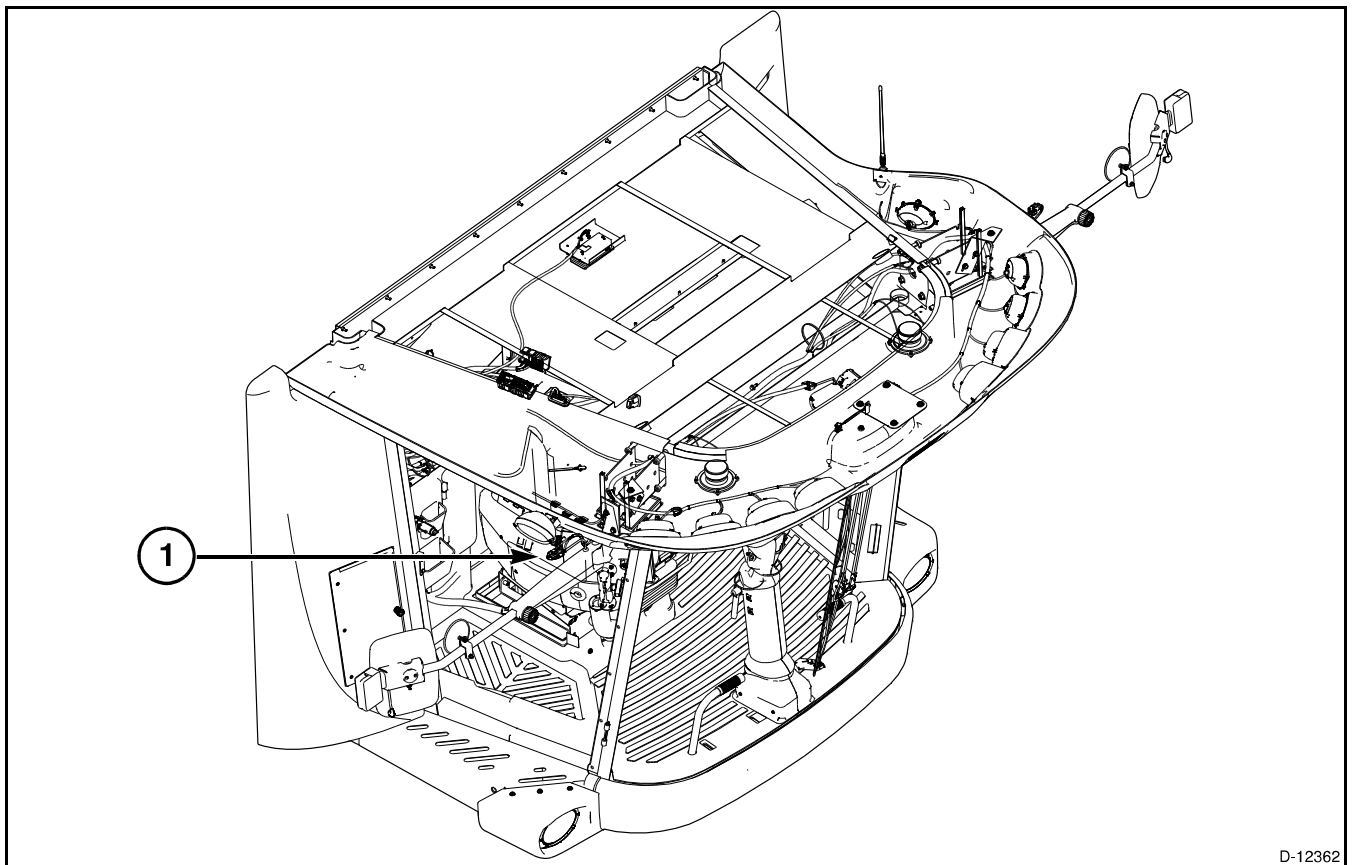


FIG. 6

FIG. 6: Through the opening in the roof assembly disconnect the combine wiring harness (1) from the mirror assembly.