

Cat products.

Dispose of all fluids according to local regulations and mandates.

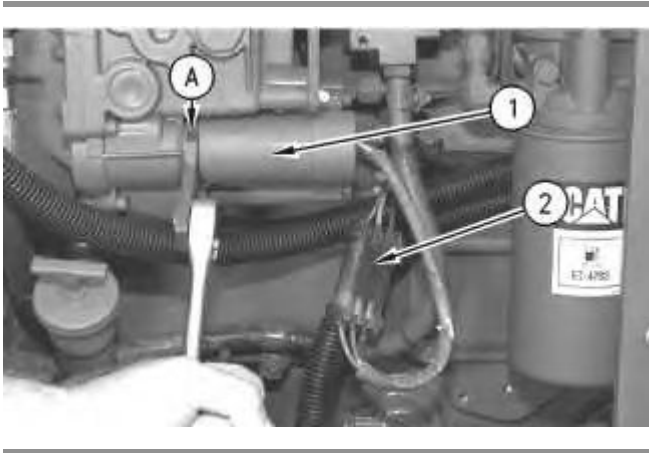


Illustration 1

g00585831

1. Disconnect the harness assembly (2) from fuel shutoff solenoid (1).
2. Use Tooling (A) to remove the fuel shutoff solenoid from the governor.
3. Remove the O-ring seal from the shutoff solenoid .

Installation Procedure

Table 2

Required Tools			
Tool	Part Number	Part Description	Qty
A	9U-5120	Spanner Wrench ⁽¹⁾	1

⁽¹⁾ This tool is part of the **128-8822** Fuel System and Governor Tool Group.

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

NOTICE

Care must be taken to ensure that fluids are contained during