

Disassembly and Assembly

725C Articulated Truck

Media Number -UENR2386-01

Publication Date -01/10/2014

Date Updated -29/04/2019

i02379287

Window Wiper and Wiper Motor (Rear) - Remove and Install

SMCS - 7305-010-MQ; 7305-010-RE

Removal Procedure

Note: Put identification marks on all hoses, on all hose assemblies, on all wires, and on all tube assemblies for installation purposes. Plug all hose assemblies and all tube assemblies. This helps to prevent fluid loss, and this helps to keep contaminants from entering the system.

NOTICE

Damage may occur to the splines on the wiper arm assembly during removal. Replacement of the wiper arm assemblies is recommended to ensure that the splines are properly formed to the shaft.

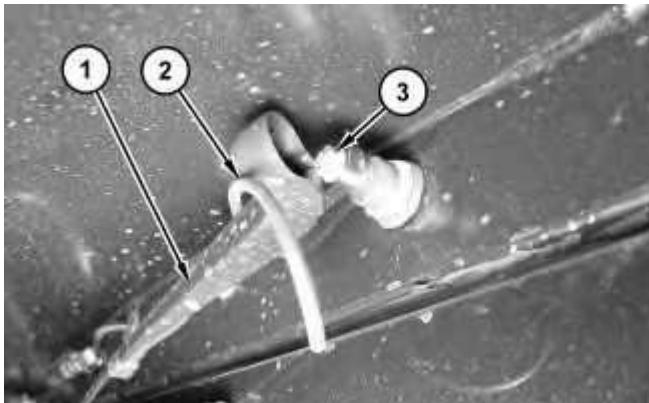


Illustration 1

g01187938

1. Disconnect hose (2). Remove nut (3) and wiper arm (1).
-

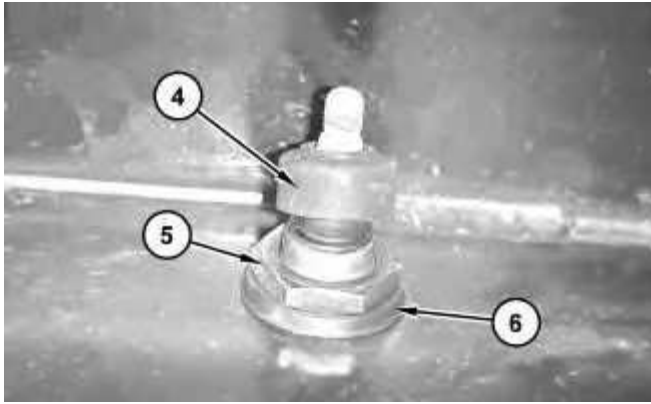


Illustration 2

g01187943

2. Remove cap (4), retaining nut (5), and washers (6).



Illustration 3

g01187982

3. Remove cover (7).

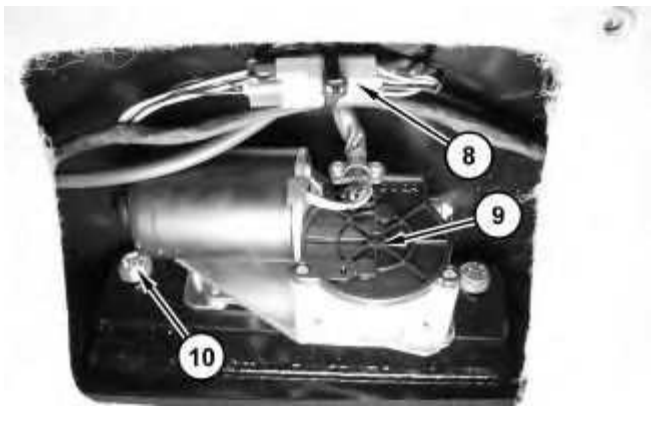


Illustration 4

g01187986

4. Remove the cable strap and disconnect harness assembly (8). Remove bolts (10). Remove wiper motor (9).

Installation Procedure