

## Installation

- 1. Drill a hole through floor plate as shown in Detail B.
- 2. Attach clip 10 to floor plate using hardware 12, 13 and 14 supplied.
- 3. Remove existing floor plate and accelerator pedal. (See illustration above.)
- 4. Attach foot control pedal assembly 1 to floor plate 3 using existing pin and retaining ring.
- 5. Attach clip 11 to foot control wiring harness.
- 6. Install clip 11 under stop nut as shown in Detail C.
- 7. Carefully route foot control wiring harness as shown in Detail C. Make certain that harness moves freely through rotation of accelerator pedal and does not bind on stop bolt.
- 8. Tighten down clips so that harness is secured from slipping due to pedal movement.
- 9. Snap accelerator rod 2 onto foot control pedal 1.
- 10. Route foot control harness through clip 10.
- 11. Remove front panel from console and unplug shift lever harness from harness B.
- 12. Remove shift lever assembly from steering column.
- 13. Attach switch lever assembly 6 to steering column using hardware 7 and 8 as shown in Detail D. Locate in same position as shift lever. Connect harness 22 as shown in Detail D.
- 14. Drill holes into cowl support as shown in hole pattern detail.
- 15. Mount relay bracket 15 to chassis support as shown in Detail E using hardware 16 supplied. Mount relays 17 and 18 to relay bracket using hardware 19 and 20.
- 16. Connect harness 21 as shown in Detail E.
- 17. Test foot control for proper function.
- 18. Secure switch assembly harness onto steering column with band 9 as shown in Detail D.


## **ENGINE SHUTDOWN KIT (LPG models only)**

## Description

This option will shutdown the engine if the following conditions occur:

- A: High transmission temperature.
- B: High coolant temperature.
- C: Low engine oil pressure.

If any of the fault conditions occur a high pitch tone will sound for 30 seconds. If the engine is not turned off before 30 seconds the engine will shutdown and the horn will sound. The engine can be restarted and operated for 30 seconds by recycling the key switch.

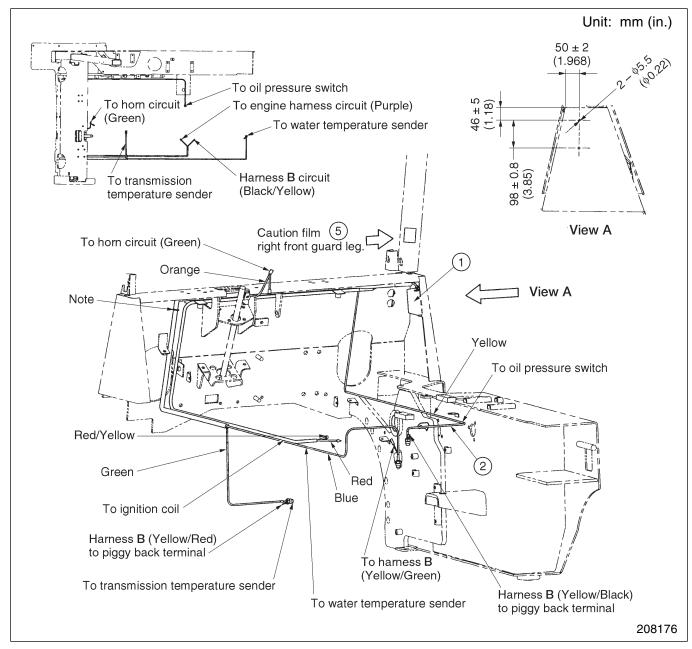

This kit consists of following parts.

- 1 Module
- 2 Harness

- 3 Bolt, Nut, Lockwasher (2 sets, not shown)
- 4 Tie wrap (twelve, not shown)
- 5 Caution film