



General Information and Specifications

2.8.4 Assembly Instructions for 37° (JIC) Flare Fittings

1. Inspect the flare for obvious visual squareness and concentricity issues with the tube OD. Ensure that surface is smooth, free of rust, weld and brazing splatter, splits, dirt, foreign matter, or burrs. If necessary, replace fitting or adapter.

NOTICE

DO NOT force a misaligned or short hose/tube into alignment. It puts undesirable strain onto the joint eventually leading to leakage.

2. Align tube to fitting and start threads by hand.


NOTICE

The torque method should NOT be used on lubricated or oily fittings. No lubrication or sealant is required. The lubrication would cause increased clamping force and cause fitting damage.

3. Torque assembly to value listed in below mentioned table while using the Double Wrench Method.

Note: Torque values provided in below table are segregated based on the material configuration of the connection.

a. 37° Flare (JIC) Thread - Steel

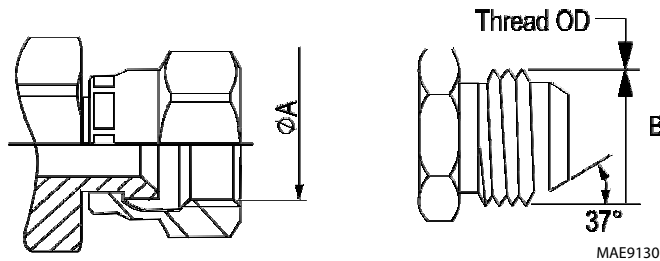

MAE9130

TYPE/FITTING IDENTIFICATION													Flats From Wrench Resistance (F.F.W.R)**
Material	Dash Size	Thread Size (UNF)	ØA*		ØB*		[Ft-Lb]			[Nm]			
			(in)	(mm)	(in)	(mm)	Min	Nom	Max	Min	Nom	Max	
STEEL FITTINGS WITH STEEL MATING COMPONENTS; UN-LUBRICATED THREADS	2	5/16-24	0.28	7.00	0.31	7.75	6	7	7	8	9	10	--
	3	3/8-24	0.34	8.60	0.37	9.50	8	9	10	11	12	14	--
	4	7/16-20	0.39	10.00	0.44	11.10	13	14	14	18	19	19	1-1/2 to 1-3/4
	5	1/2-20	0.46	11.60	0.50	12.70	14	15	15	19	20	21	1 to 1-1/2
	6	9/16-18	0.51	13.00	0.56	14.30	22	23	24	30	31	33	1 to 1-1/2
	8	3/4-16	0.69	17.60	0.75	19.10	42	44	46	57	60	63	1-1/2 to 1-3/4
	10	7/8-14	0.81	20.50	0.87	22.20	60	63	66	81	85	89	1 to 1-1/2
	12	1 1/16-12	0.97	24.60	1.06	27.00	84	88	92	114	120	125	1 to 1-1/2
	14	1 3/16-12	1.11	28.30	1.19	30.10	100	105	110	136	142	149	1 to 1-1/2
	16	1 5/16-12	1.23	31.30	1.31	33.30	118	124	130	160	168	176	3/4 to 1
	20	1 5/8-12	1.54	39.20	1.63	41.30	168	176	185	228	239	251	3/4 to 1
	24	1 7/8-12	1.80	45.60	1.87	47.60	195	205	215	264	278	291	3/4 to 1
32	2 1/2-12	2.42	61.50	2.50	63.50	265	278	292	359	377	395	3/4 to 1	


NOTE:

*ØA and ØB thread dimensions for reference only.

** Refer to Section 2.8.15, "FFWR and TFFT Methods", for FFWR procedure requirements.



b. 37° Flare (JIC) Thread - Aluminum Brass

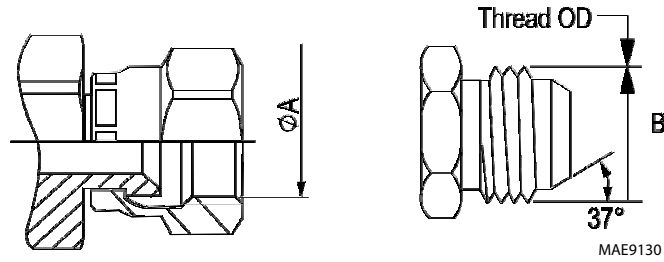

TYPE/FITTING IDENTIFICATION													Flats From Wrench Resistance (F.F.W.R)**
Material	Dash Size	Thread Size (UNF)	ØA*		ØB*		[Ft-Lb]			[Nm]			
			(in)	(mm)	(in)	(mm)	Min	Nom	Max	Min	Nom	Max	
ALUMINUM/BRASS FITTINGS OR ALUMINUM/BRASS MATING COMPONENTS; UN-LUBRICATED THREADS	2	5/16-24	0.28	7.00	0.31	7.75	4	4	5	5	6	7	--
	3	3/8-24	0.34	8.60	0.37	9.50	5	6	7	7	8	9	--
	4	7/16-20	0.39	10.00	0.44	11.10	8	9	9	11	12	13	1-1/2 to 1-3/4
	5	1/2-20	0.46	11.60	0.50	12.70	9	10	10	12	13	14	1 to 1-1/2
	6	9/16-18	0.51	13.00	0.56	14.30	14	15	16	19	20	21	1 to 1-1/2
	8	3/4-16	0.69	17.60	0.75	19.10	27	29	30	37	39	41	1-1/2 to 1-3/4
	10	7/8-14	0.81	20.50	0.87	22.20	39	41	43	53	56	58	1 to 1-1/2
	12	1 1/16-12	0.97	24.60	1.06	27.00	55	57	60	74	78	81	1 to 1-1/2
	14	1 3/16-12	1.11	28.30	1.19	30.10	65	68	72	88	93	97	1 to 1-1/2
	16	1 5/16-12	1.23	31.30	1.31	33.30	77	81	84	104	109	114	3/4 to 1
	20	1 5/8-12	1.54	39.20	1.63	41.30	109	115	120	148	155	163	3/4 to 1
	24	1 7/8-12	1.80	45.60	1.87	47.60	127	133	139	172	180	189	3/4 to 1
32	2 1/2-12	2.42	61.50	2.50	63.50	172	181	189	234	245	257	3/4 to 1	

NOTE:

*ØA and ØB thread dimensions for reference only.

** Refer to Section 2.8.15, "FFWR and TFFT Methods", for FFWR procedure requirements.