


## 2011 Mercedes-Benz C350 Sport

2009 ACCESSORIES & BODY, CAB Seats, Bunks, Restraint Systems - Testing & Repair - 204.056 C 350

- 1 Seat-back lining
- 2 Tab
- 3 Tab
- 4 Guide

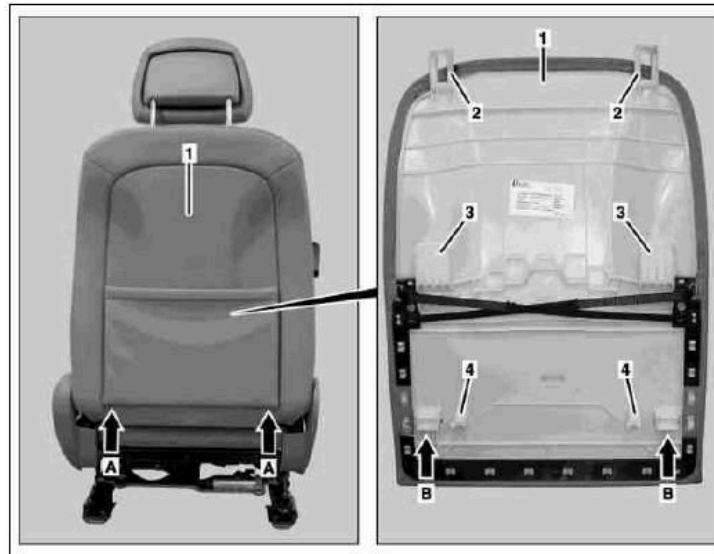


P91.10-3052-06

**Fig. 3: Identifying Seat-Back Lining, Tabs And Guides**  
Courtesy of MERCEDES-BENZ USA

**Model 207, 204.3 shown with front seat removed**

- 1 Seat-back lining
- 2 Tab
- 3 Tab
- 5 Tab
- 6 Screw

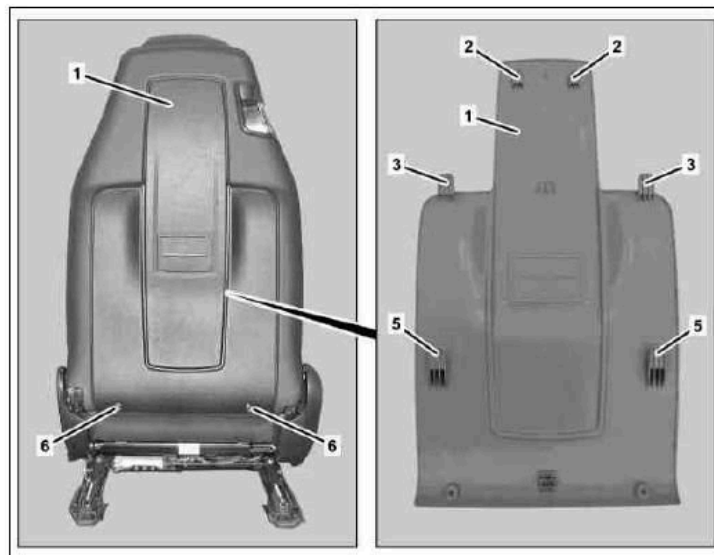

P91.10-3477-06

**Fig. 4: Identifying Seat-Back Lining, Tabs And Screws**  
Courtesy of MERCEDES-BENZ USA

☒☒	Remove/install	
1.1	Adjust left or right front seat forward and move backrest into upright position	Model 204.0/2/9, 212, 218

## 2011 Mercedes-Benz C350 Sport

2009 ACCESSORIES & BODY, CAB Seats, Bunks, Restraint Systems - Testing & Repair - 204.056 C 350


1.2	Move left or right front seat downwards and forward, move armrest forward	Model 204.3, 207
2	Remove bolts (6)	Model 204.3, 207
3	Pull seat-back lining (1) at the bottom (arrows A) far enough out to enable a screwdriver to lift the catch hooks (arrows B)	Model 204.0/2/9, 212, 218 ⓘ When removing seat-back lining (1), ensure that catch hooks (arrows B) are not damaged.
4	Release catch hooks (arrows B) and pull seat-back lining (1) at the bottom out of the backrest frame until the seat-back lining (1) can be removed downwards	Model 204.0/2/9, 212, 218
5	Remove seat-back lining (1) downwards	ⓘ <b>Installation</b> In model 204.0/2/9, 212, 218 ensure that tabs (2, 3) and guides (4) are seated correctly in backrest frame. In model 204.3, 207, ensure that tabs (2, 3, 5) are seated correctly in front seat backrest cover.
6	Install in the reverse order	

### REMOVE/INSTALL REAR SEAT CUSHION - AR91.12-P-1020CW

#### MODEL 204

#### MODEL 212 except CODE (224) Design individual seats in rear

Shown on model 204.0 without code (248) Rear seat with integrated child seat

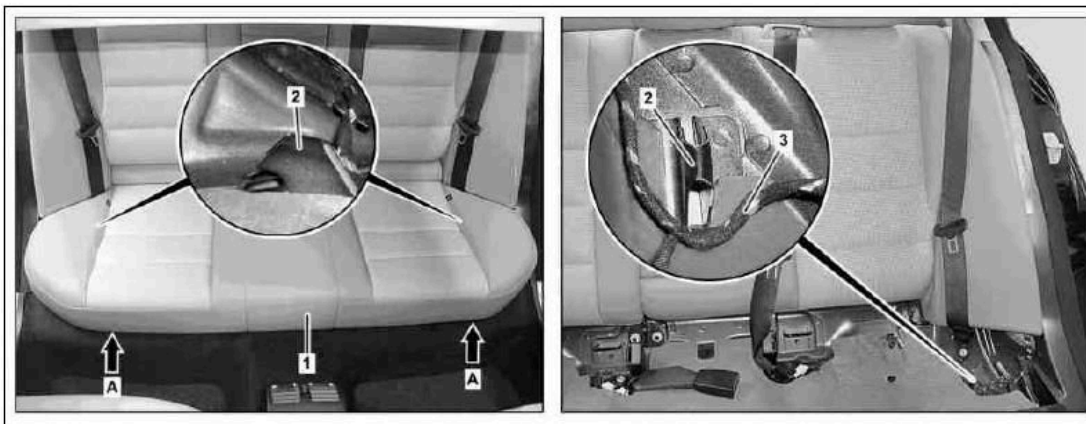

P91.12-3397-08

1 Rear seat cushion

2 Support

3 Wiring harness


**Fig. 5: Identifying Rear Seat Cushion, Support And Wiring Harness**

## 2011 Mercedes-Benz C350 Sport

2009 ACCESSORIES & BODY, CAB Seats, Bunks, Restraint Systems - Testing & Repair - 204.056 C 350

Courtesy of MERCEDES-BENZ USA


Shown on model 204.0 with code (248) Rear seat with integrated child seat

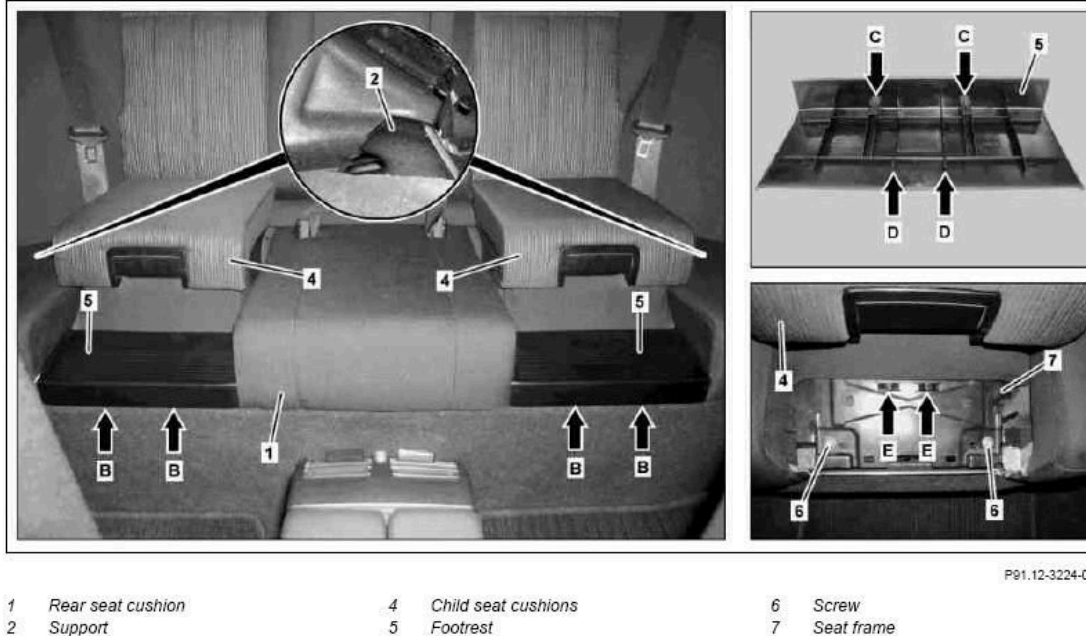

**Fig. 6: Identifying Rear Seat Cushion, Support, Footrest, Seat Frame And Screw**  
Courtesy of MERCEDES-BENZ USA

Shown on model 204.3, left side of vehicle

- 2 Support
- 3 Wiring harness
- 8 Adhesive strips



**Fig. 7: Identifying Wiring Harness, Support And Adhesive Strips**  
Courtesy of MERCEDES-BENZ USA


Shown on model 212

## 2011 Mercedes-Benz C350 Sport

2009 ACCESSORIES & BODY, CAB Seats, Bunks, Restraint Systems - Testing & Repair - 204.056 C 350



1 Rear seat cushion

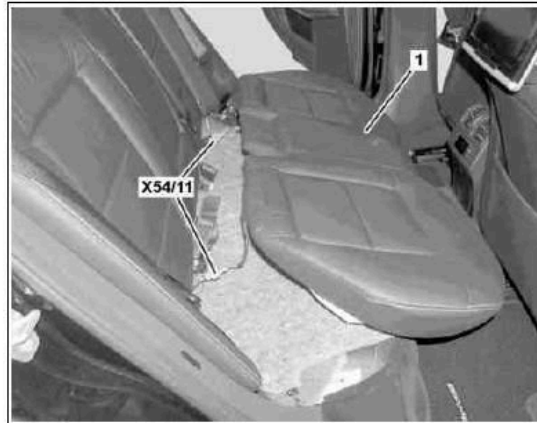X54/11 Left and right rear seat heater pad electrical connectors (with code (872) Electric seat heater for left and right rear seat)



P01.12-3398-11

**Fig. 8: Identifying Rear Seat Cushion And Left/Right Rear Seat Heater Pad Electrical Connectors**  
Courtesy of MERCEDES-BENZ USA

 	Remove/install		
1	Move both front seats forwards		
2	Pull rear seat cushion (1) upwards out of the guide sleeves (arrows A)	For vehicles without code (248) Rear seat with integrated child seat Ⓢ In model 212 with code (864) Rear entertainment system, catch the rear seat cushion (1) when pulling so that the DVD player is not damaged.	
3	Extend child seat cushions (4)	For vehicles with code (248) Rear seat with integrated child seat	
4	Remove left and right footrests (5)	For vehicles with code (248) Rear seat with integrated child seat i At the marks (arrows B) on the footrests (5) insert a suitable screwdriver, alternately push back the catch hooks (arrows C), then remove the footrests (5) horizontally from the seat frame (7). <b>i Installation</b> Insert	

## 2011 Mercedes-Benz C350 Sport

2009 ACCESSORIES & BODY, CAB Seats, Bunks, Restraint Systems - Testing & Repair - 204.056 C 350

		guides (arrows D) of footrests (5) into the cutouts (arrows E) of the seat frame (7).	
5	Remove bolts (6) on left and right seat frame (7) of rear seat cushion (1)	For vehicles with code (248) Rear seat with integrated child seat <b>Nm</b>	<b>*BA91.12-P-1010-03I</b>
6	Remove DVD player paneling	Model 212 with code (864) Rear entertainment system	AR82.60-P-7505-01EW
7	Push rear seat cushion (1) far enough back to enable the retaining brackets on the bottom of the rear seat cushion (1) to be extended from the mounts (2)	<b>i Installation</b> Check for correct seating of retaining brackets in mounts (2).	
8	Guide rear seat cushion (1) forward and disconnect left and right rear seat heater, heater pad electrical connectors (X54/11)	Model 212 with code (872) Electric seat heater for left and right rear seat	
9	Remove rear seat cushion (1)	<p>⊗ Remove rear seat cushion (1) from the vehicle carefully, to avoid damage to components in the vehicle interior or on the rear doors.</p> <p>⊗ <b>Installation:</b> Pay attention to routing and attachment of electrical wiring harness (3) in front of mounts (2), otherwise electrical wiring harness (3) is damaged.</p> <p><b>i Installation</b> Pay attention to position of center seat belt buckle.</p>	
10	Install in the reverse order		

### REAR SEATS

Number	Designation	Model 204	Model 212

## 2011 Mercedes-Benz C350 Sport


2009 ACCESSORIES & BODY, CAB Seats, Bunks, Restraint Systems - Testing & Repair - 204.056 C 350

BA91.12-P-1010-031	Bolt, rear seat cushion to body	Nm	8	10
--------------------	---------------------------------	----	---	----





### REMOVE/INSTALL REAR SEAT CUSHION - AR91.12-P-1020EL

#### MODEL 218.3

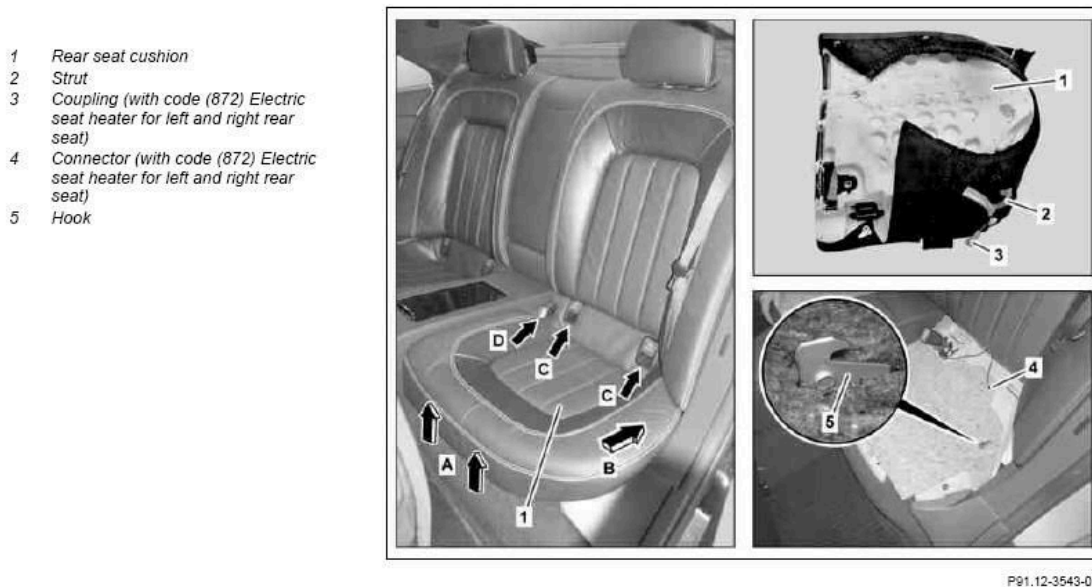Shown on left rear seat cushion (1)



**Fig. 9: Identifying Rear Seat Cushion, Strut And Coupling**  
Courtesy of MERCEDES-BENZ USA

 	Remove/install	
1	Move corresponding front seat forwards	
2	Pull rear seat cushion (1) upwards (arrows A) and out of the guide sleeves	
3	Push rear seat cushion (1) on outer side to rear (arrow B) and lift	 Unhook the strut (2) in the rear seat cushion (1) from the hook (5).
4	Detach connector (4) from coupling (3)	For vehicles with code (872) Electrically heated left and right rear seats
5	Remove rear seat cushion (1)	 <b>Installation</b> Insert rear seat cushion (1) into ISO Fix child seat attachment (arrows C) and seat belt buckle for rear seat (arrow D)
6	Install in the reverse order	




- |   |                    |   |               |   |               |
|---|--------------------|---|---------------|---|---------------|
| 1 | Rear seat backrest | 6 | Release lever | 7 | Backrest lock |
| 5 | Reinforcement      |   |               |   |               |

**Fig. 11: Identifying Rear Seat Backrest, Release Lever, Backrest Lock And Reinforcement**  
Courtesy of MERCEDES-BENZ USA





Shown on model 212

- 1 Rear seat backrest
- X54/23 Left rear seat heater electrical connector (with code (872) Electric seat heater for left and right rear seat)
- X54/24 Right rear seat heater electrical connector (with code (872) Electric seat heater for left and right rear seat)

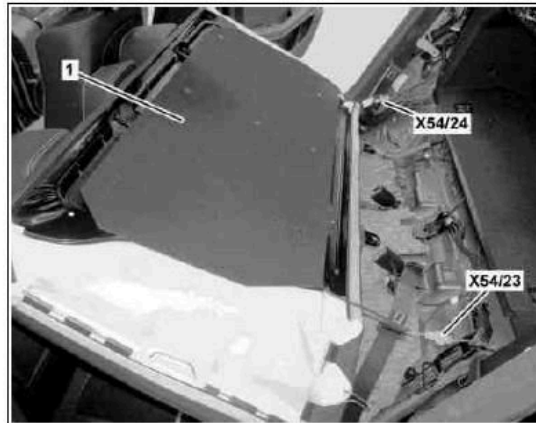

P01.12-3395-11

**Fig. 12: Identifying Rear Seat Backrest And Left/Right Rear Seat Heater Electrical Connector**  
Courtesy of MERCEDES-BENZ USA

	Remove/install		
1	Remove rear seat cushion	Model 204.0, 212	<b>AR91.12-P-1020CW</b>
		Model 204.3	AR91.12-P-1020EC
		Model 218.3	<b>AR91.12-P-1020EL</b>
2	Undo bolts (3) on rear seat backrest		
3	Unscrew nuts (4)	On model 218.3 a bolt is installed instead of a nut (4).	
			<b>*BA91.12-P-1001-03I</b>
4	Move backrest catch (7) release levers (6) to the left through the left and right holes in the reinforcement (5) and push rear seat backrest (1) forwards.		
5	Pull out seat belts until the rear seat backrest (1) can be removed, then lift rear seat backrest (1), guide out of bottom attachment points and remove from vehicle	 Carefully remove rear seat backrest (1) from the vehicle, otherwise damage may be caused to the rear door and in the entrance area.  Aid of helper	