


P88.20-2653-09

- 1 Bolts
- 2 Nuts
- 3 Bolts
- 4 Remove washers
- 5 Sealing washers
- 6 Bumper
- 7 Nut
- 8 Toothed lock washer
- 9 Antenna line
- A2/26 Left rear bumper antenna amplifier
- 10 Contact

S69/10 Trunk luggage cover "closed" limit switch

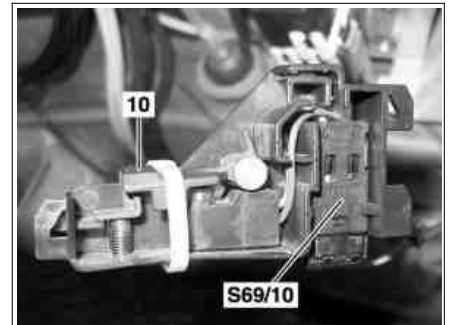

P88.20-2654-01

| 🔍 | Removal/installation | | |
|---|---|--|---------------------|
| 1 | Remove paneling from rear center section | | AR68.30-P-4785G |
| 2 | Remove left and right side paneling | | AR68.30-P-4800G |
| 3 | Open trunk lid | i Turn lid in normal position | |
| 4 | Fasten connector (10) for trunk luggage cover "closed" limit switch (S69/10) with tie strap | ⚠️ Do not damage contact (10) of trunk luggage cover "closed" limit switch (S69/10) to ensure proper function i Do not disconnect connector. | |
| 5 | Disconnect antenna lines (9) from left rear bumper antenna amplifier (A2/26) and press grommet toward outside | ⚠️ Do not damage antenna lines (9) to ensure for proper function ⚠️ Installation: Grommet for antenna lines (9) should be seated securely in fender to prevent water ingress | |
| 6 | Unscrew nut (7) and remove toothed lock washer (8) | Nm | *BA88.20-P-1002-01A |
| 7 | Unscrew bolts (3) from inner fender, remove washers (4) and sealing washers (5) | i Installation: Check sealing washers (5), replace if necessary | |
| 8 | Unscrew nut (2) from bolt (1) on outer left and right | | |
| 9 | Remove bumper (6) | i Remove bumper toward rear. | |

| | | | |
|------|------------------------------|---|-----------------|
| 10.1 | Modify the AMG-bumper | i Installation: See installation instructions for accessories Retrofitting AMG trims | AZ88.00-P-0001I |
| 11 | Install in the reverse order | | |

Nm Bumper

| Number | Designation | Model 170 |
|--------------------|---|-----------|
| BA88.20-P-1002-01A | Nut for rear bumper on rear center section Nm | 10 |