



## Replacing Front Grille Flood Light Bulb—Standard Lighting

1.

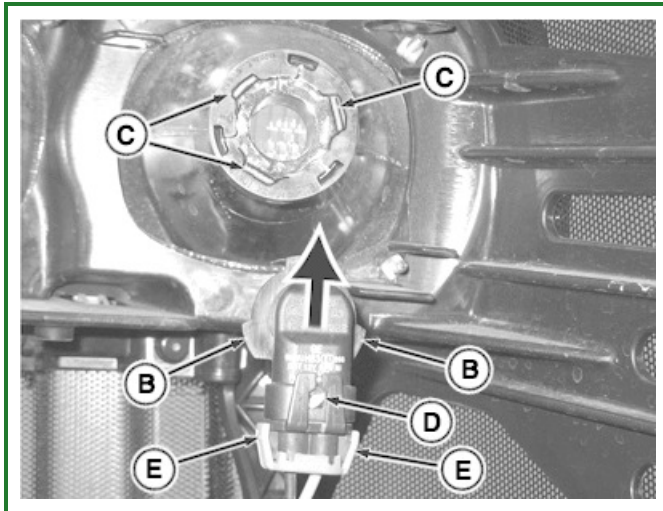

**RXA0100116-UN: Right-Hand Side Shown**

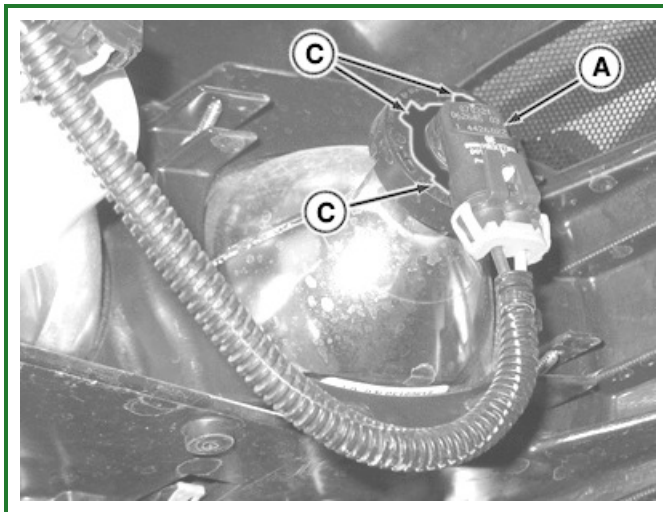

**RXA0100118-UN: Right-Hand Side Shown**

**LEGEND:**

- A - Bulb
- B - Bulb Flanges
- C - Light Assembly Notches
- D - Pin
- E - Keepers

Raise hood.

2. Rotate light Bulb (A) counterclockwise so that bulb flanges (B) align with light assembly notches (C), then pull bulb rearward from light assembly.
3. Pull keepers (E) out to the sides, make sure pin (D) is aligned with slot, and remove light bulb from harness.
4. Install new bulb in harness. Make sure pin is aligned and that keepers seat on bulb.
5. Align bulb flanges with light assembly notches and rotate bulb 1/4 turn so that wiring harness is pointed down.
6. Close hood and check to make sure new bulb works.

