


Handle Halogen Light Bulbs Safely



TS266-UN: Caution

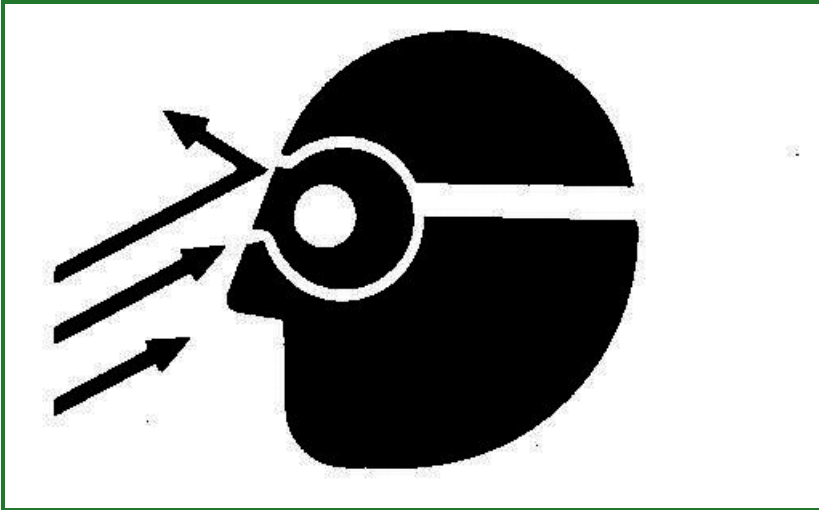

H39474-UN: Halogen Bulb

LEGEND:

A - Halogen Bulb

⚠ CAUTION:


Halogen bulbs (A) contain gas under pressure. Handling a bulb improperly could cause it to shatter into flying fragments. To avoid possible injury:

- *Turn light switch off and allow bulbs to cool before changing. Leave switch off until bulb change is done.*
- *Wear eye protection.*
- *Handle bulb by its base. Keep bulb oil free; wear gloves to avoid touching glass.*
- *Do not drop or scratch bulb. Keep moisture away.*
- *Place used bulb in the new bulb carton and dispose of properly. Keep out of reach of children.*

SV81855,00001F9-19-20140303

Replace Front HID/LED Light Assembly

1.

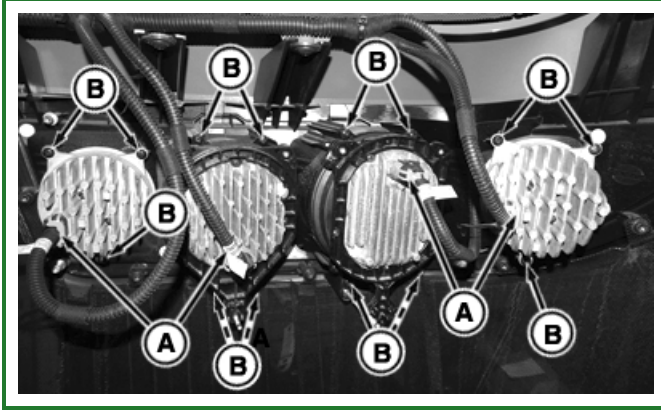

RXA0142550-UN: Right-Hand Side Shown

LEGEND:

A - Harness Connector

B - Screws

C - Light Assembly

Raise hood.

2. Disconnect harness connector (A).
3. Remove screws (B) and light assembly (C).
4. Replace light assembly.
5. Install new light assembly in reverse order of removal.
6. Close and secure hood.

SV81855,00001FA-19-20140616