



Boom Lock

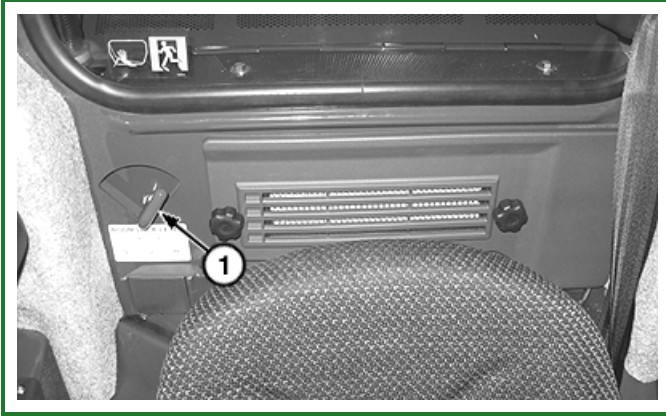

TX1067051A-UN: Boom Lock Lever

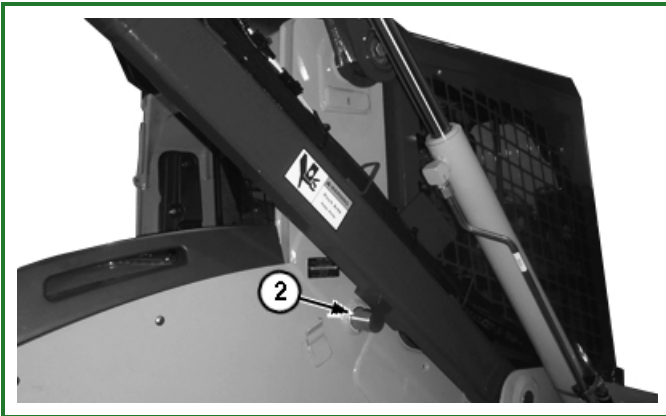

TX1127141-UN: Boom Lock

LEGEND:

- 1 - Boom Lock Lever
- 2 - Boom Lock

Use boom lock (2) when it is necessary to leave machine with boom in a raised position.

Locking boom in raised position:

1. Remove any attachment.
2. Park machine on level surface.
3. Raise boom a short distance above boom lock.
4. Rotate boom lock lever (1) towards seat to extend boom lock to locked position.
5. Slowly lower boom onto boom lock.

Disengaging boom lock:

1. Raise boom a short distance off of boom lock.
2. Rotate boom lock lever away from seat to retract the boom lock to the unlocked position.
3. Slowly lower boom to the ground.

[Go to Section_31:Group_3140](#)

JL58967,00000AF-19-20131121