


Cab Door Adjustment-Step 1

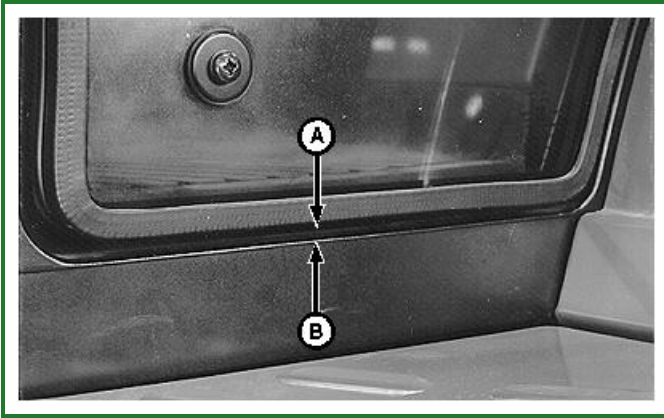

LEGEND:

- A - Seal
- B - Riser Panel
- C - Screws
- D - Upholstery

IMPORTANT:

Five-step door adjustment procedure **MUST** be followed in sequence.

Measure from bottom edge of door seal (A) to top of riser panel (B). Distance must be 6-12 mm (0.25-0.50 in.).

Remove corner post upholstery (D) out to reveal upper and lower hinge adjusting screws (C).

Loosen adjusting screws and lift or lower door to obtain correct measurement.

Tighten adjusting screws. Reinstall parts.

Go to [Section_90:Group_25](#)

RX15009025,3-19-1996/11/04

Cab Door Adjustment-Step 2

