



7.

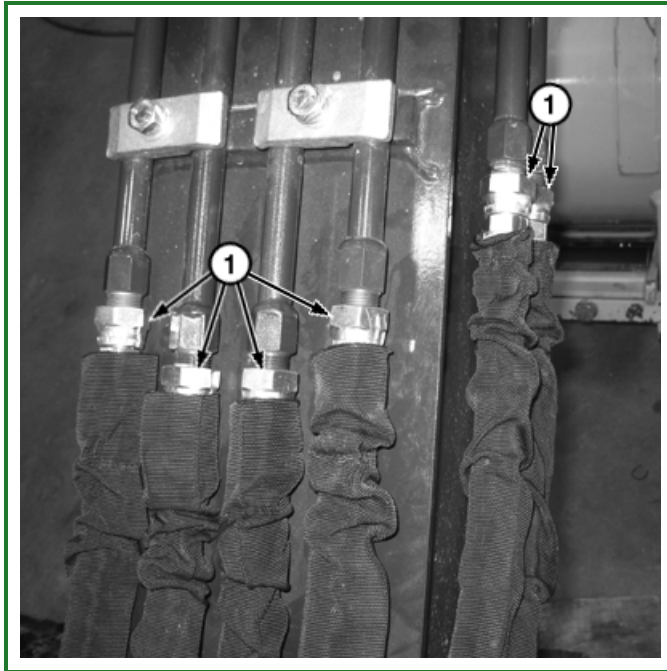

TX1134531A-UN: Boom Hydraulic Lines

LEGEND:

1 - Hydraulic Lines (6 used)

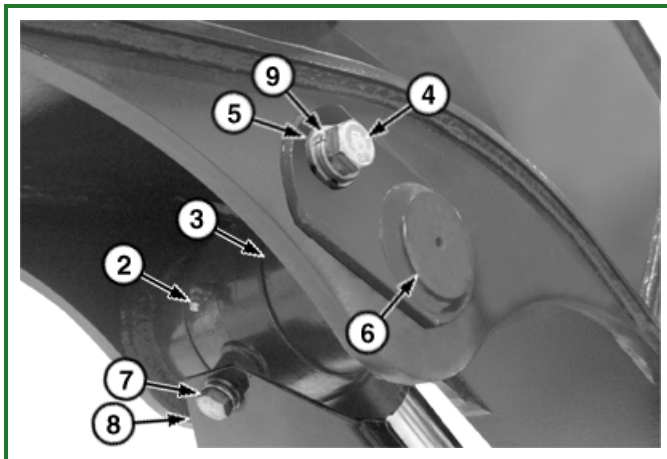

TX1134544A-UN: Boom Hydraulic Lines

LEGEND:

- 1 - Hydraulic Line (6 used)
- 2 - Boom Cylinder Shim (2 used)
- 3 - Boom Cylinder Shim (2 used)
- 4 - Cap Screw
- 5 - Bushing
- 6 - Boom Cylinder Pin
- 7 - Cap Screw (2 used)
- 8 - Cover
- 9 - Washer

Support boom cylinder using appropriate lifting device.

Item	Measurement	Specification
Boom Cylinder Weight (approximate)	59 kg	130 lb.

8. Remove cap screw (4), washer (9), and bushing (5).

9.


⚠ CAUTION:

Prevent possible crushing injury from heavy component. Use appropriate lifting device.

Remove boom cylinder pin (6) and boom cylinder shims (2 and 3). Lower boom cylinder to ground.

Item	Measurement	Specification
Boom Cylinder Weight (approximate)		59 kg 130 lb.

10. Disconnect boom light connector (X48). See [Boom Work Light Harness \(W9\) Component Location](#) . (Group 9015-10.)

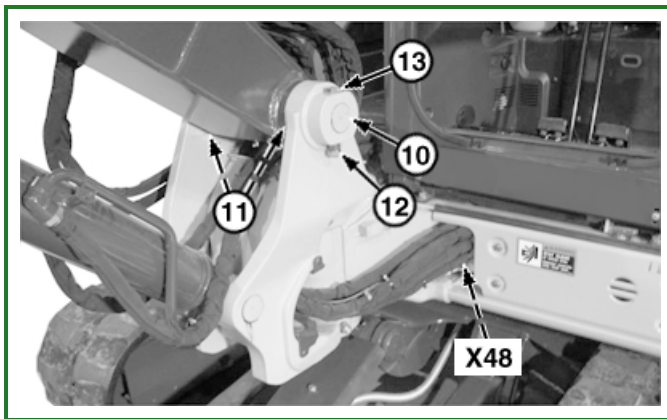

TX1134540A-UN: Boom Pin

LEGEND:

- 10 - Boom-to-Frame Pin
- 11 - Frame Shim (4 used)
- 12 - Nut (2 used)
- 13 - Cap Screw
- X48 - Boom Light Connector

11.

⚠ CAUTION:

Prevent possible crushing injury from heavy component. Use appropriate lifting device.

12. Support boom using appropriate lifting device.

Item	Measurement	Specification
Boom Arm and Bucket Weight (approximate)		671 kg 1480 lb.

13. Remove nuts (12), cap screw (13), boom-to-frame pin (10), and frame shims (11).